









Window Seals

Specifications*

CROSS SECTIONAL VIEW	DESCRIPTION	WIDTH*	FEET/CASE
WT-187 TYPE (w/adhesive)  3/16" (4,8 mm) Adhesive applied to this side	WT-187 X 5/8 WT-187 X 3/4 WT-187 X 1	5/8" (15,9 mm) 3/4" (19 mm) 1" (25,4 mm)	1760' (540 M) 1440' (440 M) 1200' (370 M)
V-125 TYPE (w/adhesive)  1/8" (3,2 mm)	V-125 X 1/2 V-125 X 5/8 V-125 X 3/4 V-125 X 1	1/2" (12,7 mm) 5/8" (15,9 mm) 3/4" (19 mm) 1" (25,4 mm)	2800' (850 M) 2000' (610 M) 1500' (460 M) 1500' (460 M)
K-187 TYPE (w/adhesive)  3/16" (4,8 mm)	K-187 X 3/8 K-187 X 5/8 K-187 X 1	3/8" (9,5 mm) 5/8" (15,9 mm) 1" (25,4 mm)	3000' (910 M) 1800' (550 M) 2000' (610 M)
BH-125 TYPE (w/adhesive)  1/8" (3,2 mm)	BH-125 X 3/4 BH-125 X 1	3/4" (19 mm) 1" (25,4 mm)	2000' (610 M) 1500' (460 M)
WT-125 TYPE (w/adhesive)  1/8" (3,2 mm)	WT-125 X 3/4	3/4" (19 mm)	1200' (370 M)
KW-197 TYPE (w/adhesive)  3/16" (4,8 mm)	KW-197 X 5/8 KW-197 X 7/8	5/8" (15,9 mm) 7/8" (22 mm)	1800' (550 M) 1200' (370 M)
KNITTED TADPOLE TAPE (w/adhesive)  1/8" (3,2mm) 1/4" (6,35mm)	TP-1/4 X 1-1/8 TP-1/4 X 1-3/8H	1-1/8" (28,5 mm) 1-3/8" (35 mm)	650' (200 M) 650' (200 M)
WOVEN TADPOLE TAPE (w/adhesive)  1/16" (1,6mm) 1/4" (6,35mm) 1-3/8" (35mm)	TPA-1/4 X 1-3/8	1-3/8" (35 mm)	530' (160 M)

*Specifications apply to plain white gasketing. Applying graphite, PTFE or other coatings may reduce width and yield of finished product.

Width/Yield Tolerance: ±5%

Packaging Specifications

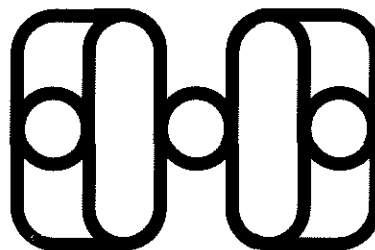
Case Size: 15½" X 15½" X 18"
(39,4 X 39,4 X 45,7 cm)

Case Weight: 30-45 lbs. (14-21 kg)

Cases/Skid: 18

Skid Size: 51" X 38" X 60"

(130 X 97 X 152 cm)



FIL-TEC™

FIL-TEC, Inc.
 P.O. Box B
 Hagerstown, MD 21741-1191
 Phone: (301) 824-6166
 FAX: (301) 824-6938