


SEKURE WSB

FIL-TEC™

WSB BINDER | FIBERGLASS | FLAT

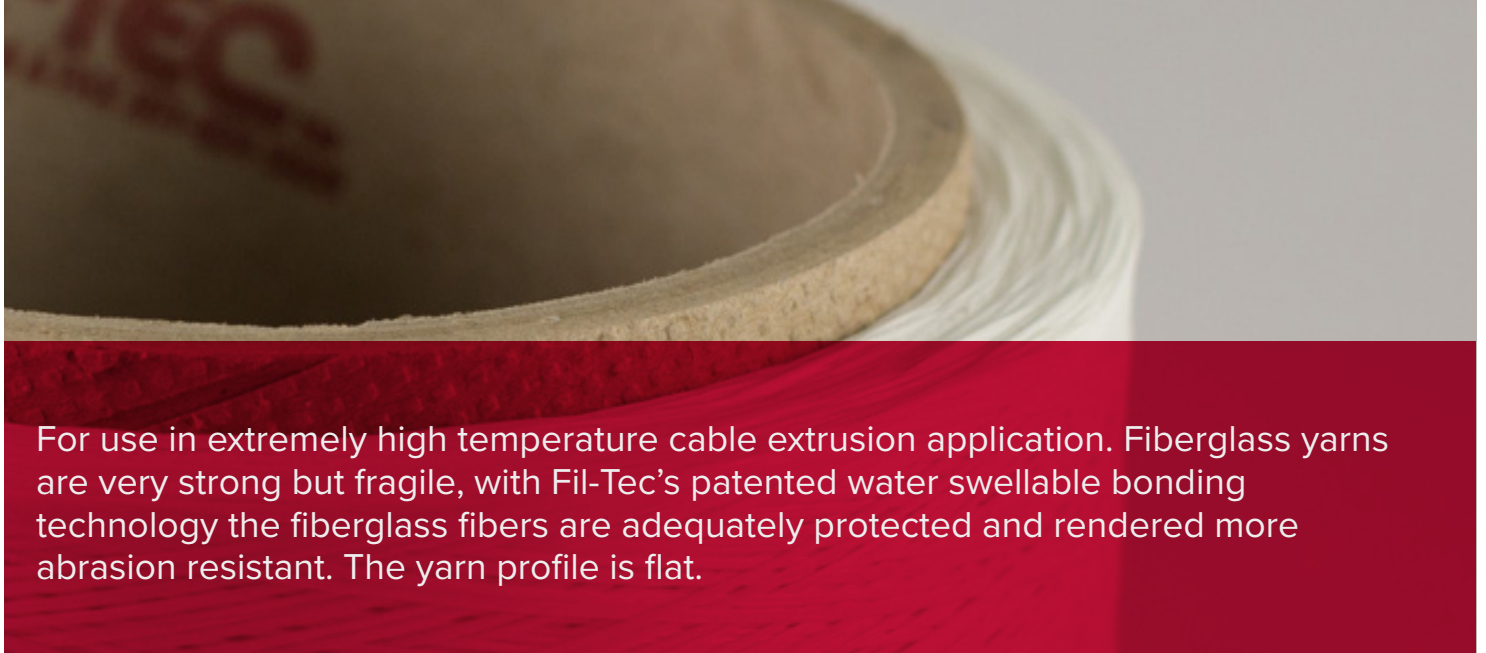

For use in extremely high temperature cable extrusion application. Fiberglass yarns are very strong but fragile, with Fil-Tec's patented water swellable bonding technology the fiberglass fibers are adequately protected and rendered more abrasion resistant. The yarn profile is flat.

FEATURES & BENEFITS

- For use in Fiber Optic and copper cables
- Designed to operate at highest possible binder head speeds
- For use in high temperature applications
- Zero shrinkage and virtually no elongation
- Proprietary patented process allows for various absorption factor levels to optimize water blocking performance in the cable while reducing cost
- Extremely low dust due to our binding technology
- Very flat profile to best control or eliminate tube indentation

PRODUCT	BASE DENIER	YIELD YD/LB	YIELD M/KG	BREAK (LBS)	BREAK (KG)	ABSORPTION	PROFILE
MGE165-45	1200	3237	6522	17	7.70	40+	Flat